


LED spotlight

LED spotlight with stabilised colour temperature; optimised for efficient and high-output accent lighting in retail and automotive applications as well as architectural lighting; spotlight with InHouse converter mounted on the TECTON GP adapter, Luminaire with TECTON GP (grand profile) adapter for simple, rapid mounting of luminaire to TECTON continuous-row systems, switchable luminaire; adapter colour white; switchable luminaire; Colour rendering Ra > 90, colour temperature 3000 K (warm white); Luminaire with WIDE FLOOD light distribution 43 °; Chromaticity tolerance (initial MacAdam): 2; Luminaire luminous flux: 3500 lm, Luminaire efficacy: 109 lm/W; service life: 50000 h for luminous flux at 90%; Luminaire input power: 32 W; mains voltage: 220-240V/ 50/60Hz; Spotlight rotatable through 360° and tiltable through 90°; converter integrated in spotlight housing; spotlight housing made of die-cast aluminium, surface finish: white Micro-textured paint; excellent glare control via front ring made of polycarbonate white; front ring serves to accommodate the accessories (optical, protective glass, honeycomb louvre); specular reflector made of polycarbonate highly reflective aluminized finish, iridescence-free; specular reflector designed to be interchangeable and retrofitted; dimensions: 249x115x252 mm; weight: 1.45 kg; spotlight fixed via TECTON GP adapter (grand profile) to the trunking using CLIX technology; Spotlight cannot be fitted over incoming feeder, central feeder or outgoing feeder




ZS_VI2_F_Strahler_M_TECGP249_whm.jpg

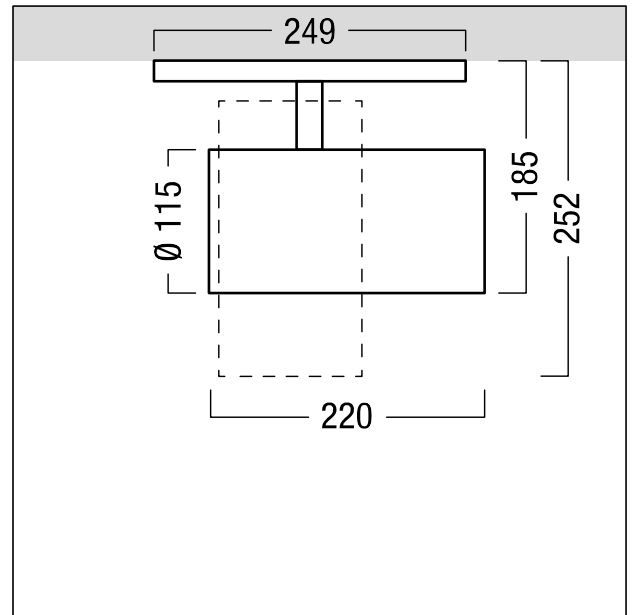

ZS_VI2_M_L_TEC-GP249.wmf

Light Distribution

STD - standard

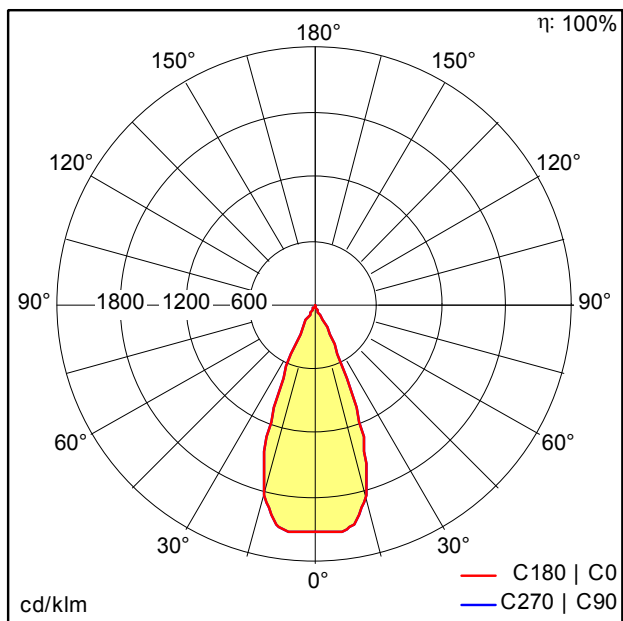

STx351.ldt

- Light Source: LED
- Luminaire luminous flux*: 3500 lm
- Luminaire efficacy*: 109 lm/W
- Colour Rendering Index min.: 90
- Ballast: 1 x 06891165 DRV TC IN 35W 850mA 43V F
- Correlated colour temperature: 3000 Kelvin
- Chromaticity tolerance (initial MacAdam): 2
- Rated median useful life*: L90 50000h at 25°C
- Luminaire input power*: 32 W Power factor = 0.97
- Dimming: SWI
- Maintenance category: C - Closed Top Reflector
- Total harmonic distortion (THD): 10.44 %

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.